

09-26-00

A

09/25/00

10925 U.S. PTO

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. RCA 89,921

First Inventor or Application Identifier Larry Cecil Brown

Title Operational Status Identification \*

Express Mail Label No. EL479513597US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 15]  
(preferred arrangement set forth below)
- Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the invention
  - Brief Summary of the invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 6]
4. Oath or Declaration [Total Pages 1]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

NOTE FOR ITEMS 1 & 15: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patent  
Box Patent Application  
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS) PTO-1449 [7] Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
13. ☐ Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	Joseph S. Tripoli		
	Thomson Multimedia Licensing Inc.		
Address	Patent Operation		
	Two Independence Way, P. O. Box 5312		
City	Princeton	State	NJ
		Zip Code	08543-5312
Country	USA	Telephone	609/734-9503
		Fax	609/734-9700

Name (Print/Type)	Alexander J. Burke	Registration No. (Attorney/Agent)	40,425
Signature	<i>Alexander Burke</i>	Date	25 September 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

\*System for a Modem or Other Communication System

Express Mail Label: EL479513597US

PTO/SB/17 (12/99)

Approved for use through 09/30/2000 OMB 0651-0032  
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL****for FY 2000**

Patent fees are subject to annual revision.

Small Entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12  
See 37 C.F.R. §§ 1.27 and 1.28

TOTAL AMOUNT OF PAYMENT (\$) 826

**Complete if Known**

Application Number	
Filing Date	HEREWITH
First Named Inventor	Larry Cecil Brown
Examiner Name	
Group / Art Unit	
Attorney Docket No	RCA 89,921

**METHOD OF PAYMENT (check one)**

- 1.
- ☒
- The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to

Deposit Account Number 07-0832

Deposit Account Name THOMSON multimedia  
Licensing Inc.

- ☒
- Charge Any Additional Fee Required
- 
- Under 37 CFR §§ 1.18 and 1.17

- 2.
- ☐
- Payment Enclosed:
- 
- ☐
- Check
- ☐
- Money Order
- ☐
- Other

**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	690
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$) 690

**2. EXTRA CLAIM FEES**

Total Claims	Extra Claims	Fee from below	Fee Paid
21	-20** = 1	18	18
Independent Claims	4 - 3** = 1	78	78
Multiple Dependent			

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 78	202 39	Independent claims in excess of 3
104 260	204 130	Multiple dependent claim, if not paid
109 78	209 39	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 96

**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	40
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	

Other fee (specify) \_\_\_\_\_

Other fee (specify) \_\_\_\_\_

\* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$) 40

**SUBMITTED BY**

Name (Print/Type) Alexander J. Burke

Registration No. 40,425  
(Attorney/Agent)**Complete (if applicable)**

Telephone 609-734-9503

Signature

*Alexander Burke*

Date 25 September 2000

**WARNING:**

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

005225 092500

## Operational Status Identification System for A Modem or Other Communication System

This is a non-provisional application of provisional application serial  
10 No. 60/169,132 by L. C. Brown, filed December 6, 1999.

### *Field of the Invention*

This invention concerns a system for use in an interactive bi-directional  
15 communication device such as a cable modem, computer, TV, VCR, or an associated  
peripheral device.

### *Background of the Invention*

20 Home entertainment systems increasingly include both Personal  
Computer and television functions (PC/TV functions) involving multiple source and  
multiple destination communication. Such a system may receive data from satellite or  
terrestrial sources comprising High Definition Television (HDTV) broadcasts,  
Microwave Multi-point Distribution System (MMDS) broadcasts and Digital Video  
25 Broadcasts (DVB). Such a system may also provide high speed Internet access  
through a broadcast link or a coaxial link (e.g. cable TV lines) using a cable modem or  
via a telephone line link using an ADSL or ISDN (Asynchronous Digital Subscriber  
Line or Integrated Services Digital Network) compatible modem, for example. A home  
entertainment system may also communicate with local devices using different  
30 communication networks. Such local devices include Digital Video Disk (DVD),  
CDROM, VHS, and Digital VHS (DVHS™) type players, PCs, set top boxes and  
many other types of devices.

It is desirable for Internet compatible bi-directional communication  
systems that are used in conjunction with home entertainment systems to incorporate  
35 diagnostic capabilities sufficient to support in-home fault diagnosis and status  
identification. It is also desirable for cable and other modems and peripheral devices to  
support flexible information retrieval and interchange. These requirements and  
associated problems are addressed by a system according to the present invention.

### *Summary of the Invention*

005260"ST26950

5 Initialization (or other processing) functions in a communication device (e.g., a cable modem), are partitioned into a sequence of operational levels having corresponding status indications which are captured prior to a fault or other abnormal condition and retained during re-cycling of initialization for use in fault or operation analysis. In a modem performing a sequence of operations including groups of one or  
10 more individual operations (e.g. tuning, configuring etc.) having an associated status indication, a method is used for capturing an indication of system status. The method involves generating hierarchically ordered status indications reflecting the status of completion of sequentially performed groups of operations in which individual status indications are associated with corresponding groups of operations. The generated  
15 status indications are captured and retained following initiation of repetition of the groups of operations and are provided as identification of an attained operational status of the system for operation diagnosis (e.g., by display using LEDs).

#### *Brief Description of the Drawings*

20 In the drawing.

Figure 1 shows a block diagram of a cable modem incorporating operational status diagnostic capability, according to the invention.

25 Figure 2 presents a flowchart and description of operation of the Figure 1 system during initialization, according to the invention.

Figure 3 shows a cable modem start up sequence and associated visual indication mechanism, according to the invention

30 Figure 4 shows a flowchart of a method for capturing system status upon an interruption condition as used by the cable modem of Figure 1, according to the invention.

35 Figure 5 shows another visual indication mechanism (alternative to the mechanism of Figure 3) associated with a cable modem start up sequence, according to the invention.

40 Figure 6 shows additional communication processes and other operations involved in a cable modem start up sequence and associated with the status indication mechanism, according to the invention.

*Detailed Description of the Drawings*

Figure 1 shows a block diagram of a cable modem (e.g., Data Over Cable Service Interface Specification - DOCSIS standard compliant modem) incorporating operational status diagnostic capability for bi-directional Internet communication. The cable modem provides a communication bridge between a cable TV system and a PC (or another device such as a TV), for example. The modem implements DOCSIS compatible functions and communicates with the cable system head end via SNMP (System Network Management Protocol). The cable modem initialization functions are advantageously partitioned into a hierarchical sequence of operational levels with individual levels including one or more distinct operations and having associated LED status indications. The status indications identify the completed or highest operational status attained during an initialization sequence prior to interruption by a fault or other abnormal condition and are used in combination for fault finding and problem diagnosis by a field technician. Status indications for the operational levels prior to a fault or other abnormal condition are advantageously captured and communicated by visual or other means for use in fault or operation analysis. The status indications are also captured and retained in a removable or other storage medium to be available during re-cycling of the initialization, processing or diagnostic operational sequence.

The exemplary embodiment of Figure 1 supports cable modem communication and decoding of data in hierarchically arranged protocols including TCP/IP (Transmission Control Protocol/Internet Protocol), Ethernet and MPEG (Motion Picture Experts Group) protocols (e.g. per MPEG2 ISO/IEC 13818-1 of 10th June 1994, and ISO/IEC 13818-2, of 20th January 1995). In addition, the system of Figure 1 is compatible with the Multimedia Cable Networks Systems (MCNS) preliminary requirements and DOCSIS 1.0 (Data Over Cable Service Interface Specification 1.0) requirements ratified by the International Telecommunications Union (ITU) March 1998 and as specified in RFC 2669 (Request For Comment Document 2669). The RFC documents are available via the Internet and are prepared by Internet standards working groups.

The principles of the invention may be applied to any bi-directional communication system and are not restricted to cable, ADSL, ISDN or conventional type modems. Further, the disclosed system processes Internet Protocol (IP) data from a variety of Internet sources including streamed video or audio data, telephone

5 messages, computer programs, Emails or other packetized data and communications, for example.

The cable modem (system 12) of Figure 1 communicates with a CATV head-end over a bi-directional broadband high speed RF link on line 10 which typically consists of coaxial cable or hybrid fiber/coax (HFC). The modem system 12 bi-  
10 directionally communicates with devices located at a User site over local area networks (LANs). Typical User-side local area networks include Digital/Intel/Xerox Ethernet compatible networks attached via connector 72. Other User-side devices communicate via a Universal Serial Bus (USB) or HPNA compatible networks attached via connectors 82 and 77 respectively. User devices attached on the Ethernet,  
15 HPNA and USB networks may include equipment such as personal computers (PCs), network printers, video receivers, audio receivers, VCRs, DVDs, scanners, copiers, telephones, fax machines and home appliances, for example.

In operation, diplexer 20 of cable modem system 12 of Figure 1 separates upstream communications (sent from modem 12 to a CATV head-end) from  
20 downstream communications (sent from a CATV head-end to modem 12) conveyed via cable line 10. Diplexer 20 separates upstream data from downstream data based on the different frequency ranges that the upstream data (typically 5-42 MHz) and downstream data (typically 88-860 MHz) respectively employ. Controller 60 configures the elements of cable modem 12 of Figure 1 to receive MPEG2 transport  
25 data from the CATV head-end on cable line 10 and to convert the data to Ethernet, USB or HPNA compatible format for output via ports 72, 82 and 77 respectively. Similarly, controller 60 configures the elements of cable modem 12 of Figure 1 to receive Ethernet, USB or HPNA compatible data from ports 72, 82 and 77 and to convert and transmit MPEG2 transport protocol data to the CATV head-end on cable  
30 line 10. Controller 60 configures the elements of system 12 through the setting of control register values within these elements using a bi-directional data and control signal bus. Specifically, controller 60 configures tuner 15, saw filter 25, differential amplifier 30 and MCNS (Multimedia Cable Networks Systems) interface device 35 to receive a DOCSIS formatted signal on a previously identified RF channel frequency.  
35 The DOCSIS formatted signal comprises an MPEG2 transport protocol format conveying Ethernet compatible data frames including IP data content.

Controller 60 employs the process shown in Figure 2 for initializing the system of Figure 1 and employs the visual indication system of Figure 3 for displaying the corresponding modem status associated with the modem initialization sequence of  
40 Figure 2. Specifically, Figure 2 shows a series of operational states through which the Figure 1 DOCSIS compliant cable modem system 12 progresses during startup to

5 become fully operational. Upon application of power to modem system 12 in step 250 of Figure 2, controller 60 executes bootloader software uploaded from flash memory within unit 60 to set all modem components to their initial power on condition including setting status LEDs (item 89 of Figure 1) to indicate a Tuning state as shown in state 300 of Figure 3. In step 255 of Figure 2, controller 60 (Figure 1) directs  
10 system 12 in determining the RF channel frequency that tuner 15 is to be configured to receive by iteratively tuning to successive candidate RF channel frequencies until a DOCSIS compliant signal is obtained. Controller 60 recognizes a DOCSIS compliant signal on a candidate channel through the successful decode by MCNS interface processor 35 of the received data and through a correspondingly acceptable error rate  
15 for the decoded data. Upon successful completion of tuning, status LEDs 89 are set to a Ranging state as exemplified in state 305 of Figure 3.

In step 260 of Figure 2, controller 60 initiates Ranging by directing system 12 in transmitting data upstream to the CATV head-end using MCNS interface 35, amplifier 85 and RF transformer 87. This is done for a number of purposes  
20 including for adaptively and iteratively adjusting upstream and downstream communication parameters. These parameters include cable modem transmission power level and timing offset, for example. The CATV head-end determines when Ranging is completed and communicates that Ranging is terminated to system 12. At completion of Ranging, communication between system 12 and the CATV head-end  
25 involving Media Access Control (MAC) layer protocol is established. Upon successful completion of Ranging, status LEDs 89 are set to a Connecting state as shown in state 310 of Figure 3.

In step 265 of Figure 2, controller 60 initiates Connecting by directing system 12 in establishing bi-directional communication between modem system 12 and  
30 the CATV head-end involving DHCP (Dynamic Host Configuration Protocol) communication with a remote DHCP server. Specifically, the system 12 IP (Internet Protocol) address and other configuration parameters are acquired from the DHCP server and stored in memory within unit 60. Upon successful completion of the Connecting process, the cable modem is operable as an internet host, and has an  
35 assigned IP address and status LEDs 89 are set to a Configuring state as shown in state 315 of Figure 3.

In step 270 of Figure 2, controller 60 initiates Configuring by acquiring the date and time from a remote internet TIME server using internet TIME protocol and by downloading a Configuration File for modem system 12 from a remote TFTP  
40 (Trivial File Transfer Protocol) server using TFTP. Upon completion of the Configuring operation, modem system 12 has received and stored sufficient

Figure 4 shows a flowchart of a method employed by controller 60 and system 12 of Figure 1 for capturing the system 12 initialization status upon an interruption condition. The DOCSIS specification requires that a cable modem automatically re-initialize if the modem fails to complete initialization. In addition, completing initialization may take a considerable amount of time under normal system conditions, e.g., it may take up to 10 minutes for current generation modems. Further, conventional LED (or other) status indicators that are re-cycled upon modem re-initialization lose their diagnostic information and fault detection value. As a result, such LED indicators (or other re-cycling indications) in a cable modem exhibiting trouble completing initialization may have to be monitored by an installer for a long initialization period of time in order to discern how far into initialization the modem is progressing.

These advantages are achieved by advantageously partitioning the total startup sequence of events mandated by DOCSIS into a discrete number of reportable states meaningful to an installer/technician. The operational status of these individual states is recorded and made available for user access. The initialization procedure is 40 partitioned into discrete sequential states providing a sequential, cumulative indication of operational status through indicators (e.g. LEDs) associated with the states as



5 exemplified in Figure 3. The highest startup state that is reached during initialization is a valuable troubleshooting indicator for a cable modem unable to complete its startup procedure. Specifically, such an indication may enable a technician to quickly identify the internetworking system component that is preventing the modem's startup completion.

10 In the process of Figure 4 and following the start at step 200, controller 60 (Figure 1) in conjunction with system 12 in step 205, generates status indications visible on LED indicators 89. The indicators reflect the completion status of operations in the modem initialization sequence. Specifically, the operations are partitioned into discrete reportable groups of operations comprising the Tuning, Ranging, Connecting,  
15 Configuring and Registering groups of operations previously described in connection with Figures 2 and 3. Further each of the Tuning, Ranging, Connecting, Configuring and Registering groups of operations correspond to respective indicators that are meaningful to an installer/technician (as exemplified in Figure 3). As an example, upon successful completion of Tuning, status LEDs 1 and 2 (of the five LEDs comprising  
20 LEDs 89) are set to flashing mode to indicate that the Tuning group of operations is complete and the Ranging group of operations is being performed, as exemplified in state 305 of Figure 3. Although, the status monitoring system principles are described with reference to cable modem initialization functions, this is exemplary only. The status monitoring principles may be applied to any sequence of operations for fault  
25 diagnosis, general condition monitoring, or commanded test routines, for example and are not restricted in application to initialization functions.

Upon interruption of the initialization sequence of operations because of a fault or other condition, controller 60 in step 210 captures the status indications previously generated in step 205. An interruption condition may include, for example,  
30 either (a) a fault condition, (b) an abnormal operation condition or (c) a commanded interrupt condition. In step 215, controller 60 retains the captured status indications in internal memory (or a removable memory module) during recycling of the initialization sequence which may be initiated automatically or upon a User command or other command. The retained status indications identify the highest operational state attained  
35 by system 12 prior to the interruption. As previously explained, this information is valuable, time saving diagnostic information usable by a technician for fault finding and component replacement.

In step 220, controller 60 provides the retained status indications for display on LEDs 89 and also makes them available for other forms of access by a  
40 technician for system operation diagnosis. The status indications may alternatively be displayed as hierarchically ordered indications in the form of a visible progressive

Figure 6 details additional communication processes and other operations involved in the system 12 start up sequence. Specifically, Figure 6 details further functions occurring within the Tuning 600, Ranging 605, Connecting 610, Configuring 615 and Registering 620 groups of operations previously more generally described in connection with Figures 2-5.

Returning to Figure 1, following initialization and in normal operation, an RF carrier is modulated with MPEG2 transport protocol data using 64 or 256 QAM (Quadrature Amplitude Modulation). The MPEG2 transport data includes Ethernet formatted data which in turn includes IP data representing a User requested HTML (HyperText Mark-Up Language) web page, for example. The MPEG transport data is provided by diplexer 20 to tuner 15. Tuner 15 down-converts the input signal from diplexer 20 to a lower frequency band which is filtered by saw filter 25 to enhance signal isolation from neighboring RF channels. The filtered signal from unit 25 is level shifted and buffered by differential amplifier 30 to provide a signal compatible with MCNS interface processor 35. The resultant down converted, level-shifted signal from amplifier 30 is demodulated by MCNS processor 35. This demodulated data is further trellis decoded, mapped into byte aligned data segments, deinterleaved and Reed-Solomon error corrected within processor 35. Trellis decoding, deinterleaving and Reed-Solomon error correction are known functions described, for example, in the

5 reference text *Digital Communication*, Lee and Messerschmidt (Kluwer Academic Press, Boston, MA, USA, 1988). Processor 35 further converts the MPEG2 format data to Ethernet data frames that are provided to controller 60.

Controller 60 parses and filters the Ethernet compatible data from unit 35 using filters configured from the CATV head-end. The filters implemented by  
10 controller 60 match data identifiers in incoming Ethernet frame packets provided by unit 35 with identifier values pre-loaded from the CATV head-end. The identifier values are pre-loaded during the previously performed initialization operation described in connection with Figure 2. The filtered Ethernet compatible serial data is communicated to a PC via Ethernet interface 65, filter and isolation transformer 70 and  
15 port 72. Interface 65 buffers and conditions the data from controller 60 for filtering and transforming by unit 70 for output to a PC via port 72.

In similar fashion, controller 60 converts and filters data (conveyed in Ethernet MAC frames) from processor 35 for output in USB format via port 82 or in HPNA format via port 77. The USB data is buffered by transceiver 75 and filtered by  
20 noise and interference suppression (EMI/ESD) filter 80 prior to output to USB compatible LAN devices connected to port 82. Similarly, the HPNA data is conditioned by interface 62 and buffered by transceiver amplifier 67 prior to output to HPNA compatible LAN devices connected to port 77.

Modem system 12 also communicates data upstream from an attached  
25 PC, for example, to a CATV head-end. For this purpose, controller 60 of system 12 receives Ethernet compatible data from the attached PC via port 72, interface 65 and filter/isolation transformer 70 and provides it to processor 35. Processor 35 modulates an RF carrier with the received Ethernet format data using 16 QAM or QPSK (Quadrature Phase Shift Keying Modulation). The resultant modulated data is time  
30 division multiplexed onto cable line 10 for upstream communication via amplifier 85, transformer 87 and diplexer 20. Amplifier 85 outputs the data to the CATV head-end with an appropriate power level selected in the previously described initialization process. Transformer 87 provides a degree of fault and noise isolation in the event of a failure in the modem 12 or upon the occurrence of locally generated noise in the  
35 modem or in attached devices.

In similar fashion, modem system 12 also communicates data upstream from devices attached via USB port 82 or via HPNA port 77. In an exemplary implementation, controller 60 of system 12 receives Ethernet compatible data from transceiver 75 and provides it to processor 35 for upstream communication in the  
40 manner previously described. For this purpose, transceiver 75 receives Ethernet data encapsulated within USB frames from port 82 via filter 80 and removes the USB frame

0936921-0936921

5 data to provide Ethernet format data to controller 60. Similarly, interface 62 receives data encapsulated in HPNA format from port 77 via transceiver 67 and provides Ethernet format data to controller 60.

Controller 60 is also responsive to on/off and reset switch 90 and performs a variety of functions in addition to those already described. These functions  
10 include displaying retained status indications on LEDs 89 following recycling of an initialization sequence upon an interrupt condition. This is done in response to User selection of a third position on power switch 90. Further, controller 60 configures modem 12 parameters using configuration information provided from a CATV head-end. Controller 60 also directs system 12 in synchronizing and multiplexing upstream  
15 communication onto cable line 10 and implements a rate limit in controlling upstream data traffic. Further, controller 60 bi-directionally filters received data and provides selected data to either the CATV head-end or LAN devices attached to ports 72, 77 and 82. Controller 60 also supports polling communication with the CATV head-end. The polling communication is initiated by the CATV head-end and comprises  
20 continuous but intermittent communication with individual modems to determine status and to identify modem or line failures.

The architecture of the system of Figure 1 is not exclusive. Other architectures may be derived in accordance with the principles of the invention to accomplish the same objectives. Further, the functions of the elements of the cable  
25 modem system 12 and the process steps of Figure 4 may be implemented in whole or in part within the programmed instructions of controller 60. In addition, the principles of the invention may be applied to provide a technician friendly status monitoring and condition diagnosis system for any system employing distinctly identifiable sequential operations

5 What is claimed is:

1. In a bi-directional communication system performing a sequence of operations including groups of one or more individual operations having an associated status indication, a method for capturing indication of system status, comprising the  
10 steps of:

generating ordered status indications reflecting the status of completion of sequentially performed groups of operations wherein individual status indications are associated with corresponding groups of operations,

capturing said generated status indications,  
15 retaining said captured status indications following initiation of repetition of said groups of operations; and

providing said retained captured status indications as identification of an attained operational status of said system for system operation diagnosis.

20 2. A method according to claim 1, wherein  
said bi-directional communication system is a cable modem,  
said generating step generates hierarchically ordered status indications,  
and

said sequentially performed groups of operations comprise at least one  
25 of (a) an initialization procedure of said cable modem system, (b) a fault diagnosis procedure of said cable modem system and (c) an abnormal condition monitoring procedure of said cable modem system.

3. A method according to claim 1, wherein  
30 said groups of operations include two different operations from operations including (a) tuning, (b) ranging (c) configuring and (d) registering.

4. A method according to claim 1, wherein  
said status indications identify the status of groups of operations being  
35 performed prior to interruption by a condition including at least one of (a) a fault condition, (b) an abnormal operation condition and (c) a commanded interruption condition.

005260-02600

5                   5. A method according to claim 1, wherein  
said captured status indications identify the highest operational state  
reached in initialization of said system prior to an interruption and are provided in  
response to a User command.

10                  6. A method according to claim 5, wherein  
said User command comprises selection of a power switch setting.

                  7. A method according to claim 1, wherein  
said captured status indications are usable in combination for fault  
15 finding and problem diagnosis by a technician.

                  8. A method according to claim 1, wherein  
said providing step comprises at least one of (a) displaying said retained  
captured status indications to a User of said system, and (b) maintaining said retained  
20 captured status indications in memory accessible by a User of said system.

                  9. A method according to claim 8, wherein  
said providing step comprises retaining said captured status indications  
during re-cycling of said sequentially performed groups of operations.

25                  10. A method according to claim 1, wherein  
said providing step comprises displaying said retained captured status  
indications as hierarchically ordered visual indicators comprising at least one of (a)  
LEDs, (b) a visible progressive illuminated bar indicator, (c) non-LED illuminations  
30 and (d) audible indications.

                  11. A method according to claim 1, wherein  
said providing step comprises maintaining said retained captured status  
indications in a removable storage medium to be available during re-cycling of said  
35 sequentially performed groups of operations.

                  12. A method according to claim 1, wherein  
said providing step comprises providing via remote access  
communication said retained captured status indications as hierarchically ordered fields  
40 of data indicators.

005260" 5T269960

5           13. In a modem system performing an initialization procedure comprising a sequence of operations including groups of one or more individual operations having an associated status indication, a method for capturing indication of system status, comprising the steps of:

                  generating hierarchically ordered status indications reflecting the status  
10 of completion of sequentially performed groups of operations wherein individual status indications are associated with corresponding groups of operations and identify the status of groups of operations being performed prior to interruption by a condition including at least one of (a) a fault condition, (b) an abnormal operation condition and (c) a commanded interruption condition;

15           capturing said generated status indications;  
                  retaining said captured status indications following initiation of repetition of said groups of operations; and  
                  providing said retained captured status indications as identification of an attained operational status of said system for system operation diagnosis.

20           14. A method according to claim 13, wherein  
                  said sequentially performed groups of operations comprise at least one of (a) an initialization procedure of said cable modem system, (b) a fault diagnosis procedure of said cable modem system and (c) an abnormal condition monitoring  
25 procedure of said cable modem system.

                  15. A method according to claim 13, wherein  
                  said captured status indications identify the highest operational state reached in initialization of said system.

30           16. A method according to claim 13, wherein  
                  said captured status indications are usable in combination for fault finding and problem diagnosis by a technician.

35           17. A method according to claim 13, wherein  
                  said groups of operations include two different operations from operations including (a) tuning, (b) ranging (c) configuring and (d) registering.

5                   18. A method according to claim 13, wherein  
said captured status indications identify the highest operational state  
reached in initialization of said system prior to an interruption and are provided in  
response to a User command.

10                   19. In a modem system performing an initialization procedure  
comprising a sequence of operations including groups of one or more individual  
operations having an associated status indication, a method for capturing indication of  
system status, comprising the steps of:

generating hierarchically ordered status indications reflecting the status  
15 of completion of sequentially performed groups of operations partitioned into a  
hierarchical sequence of operational levels with individual levels including one or more  
of (a) tuning, (b) ranging (c) configuring and (d) registering operations and having a  
corresponding status indication;

capturing said generated status indications;  
20 retaining said captured status indications following initiation of  
repetition of said groups of operations; and

providing said retained captured status indications as identification of  
an attained operational status of said system for system operation diagnosis.

25                   20. A method according to claim 19, wherein  
said sequentially performed groups of operations comprise at least one  
of (a) an initialization procedure of said cable modem system, (b) a fault diagnosis  
procedure of said cable modem system and (c) an abnormal condition monitoring  
procedure of said cable modem system.

30                   21. A method according to claim 19, wherein  
said captured status indications identify the highest operational state  
reached in initialization of said system.

005260" 24269260



20

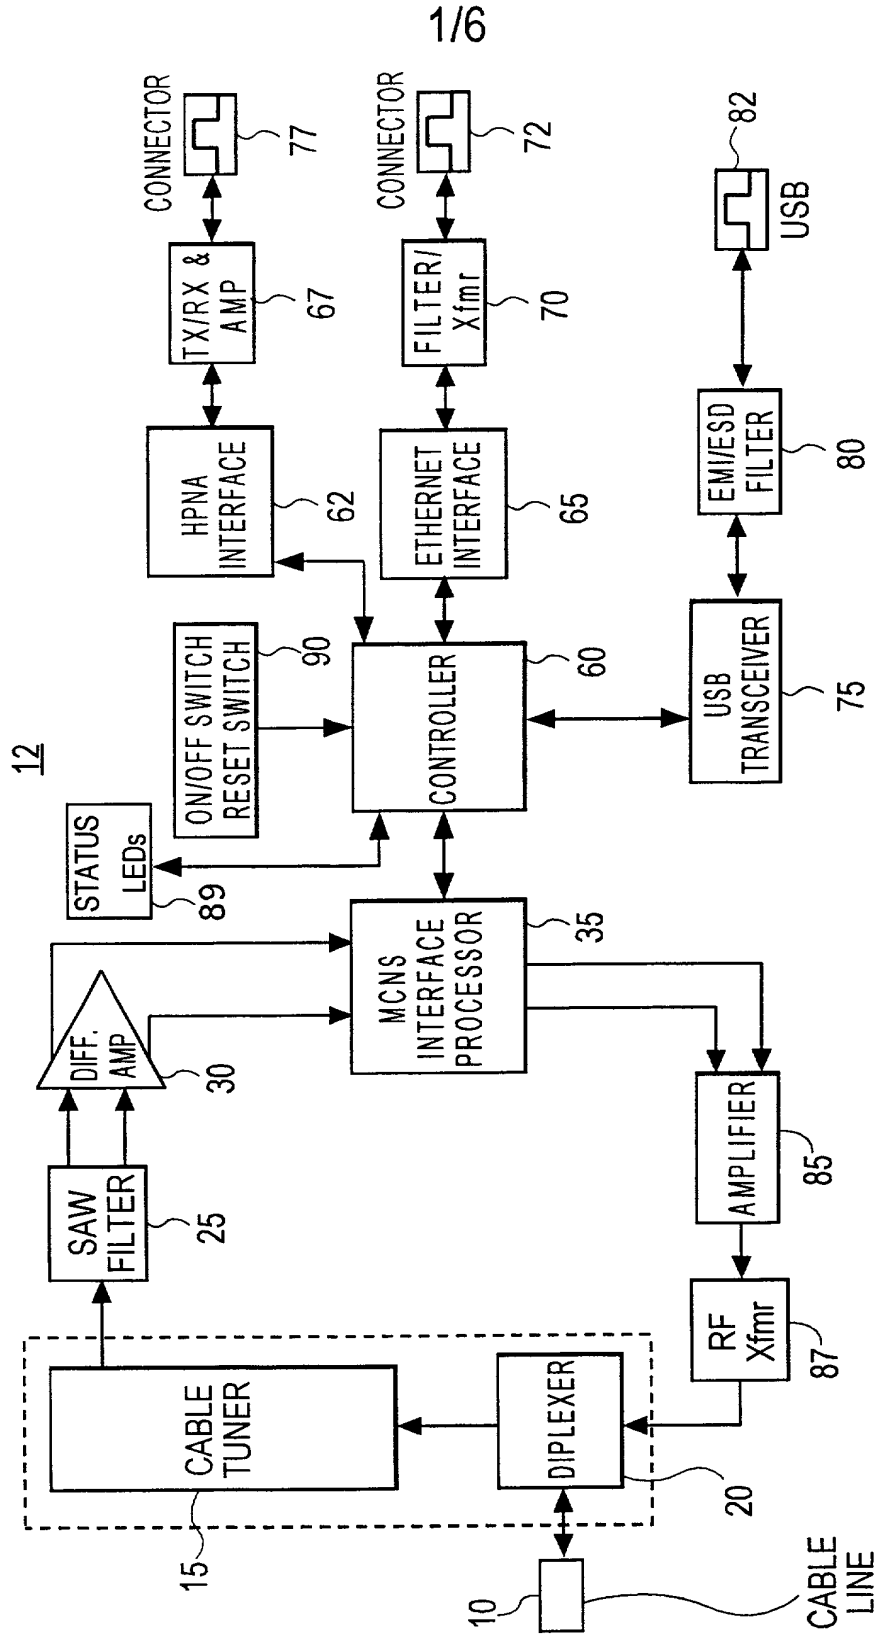


FIG. 1

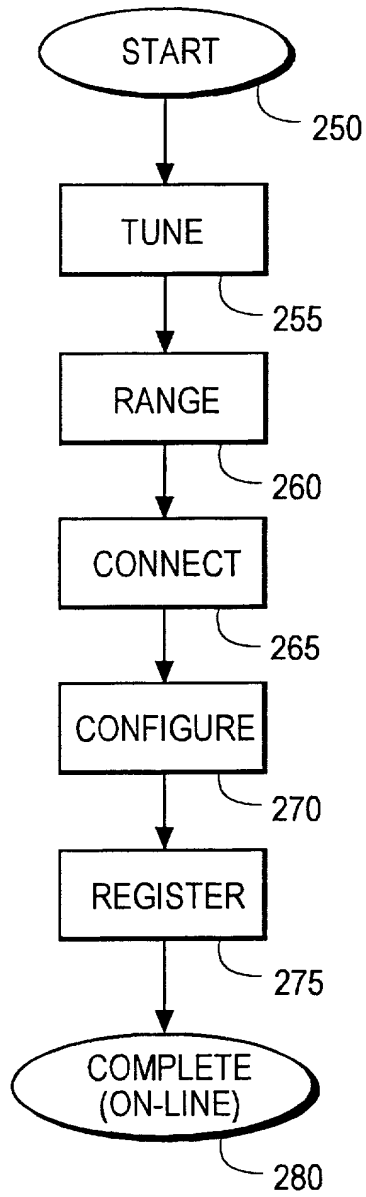


FIG. 2

FIG. 3

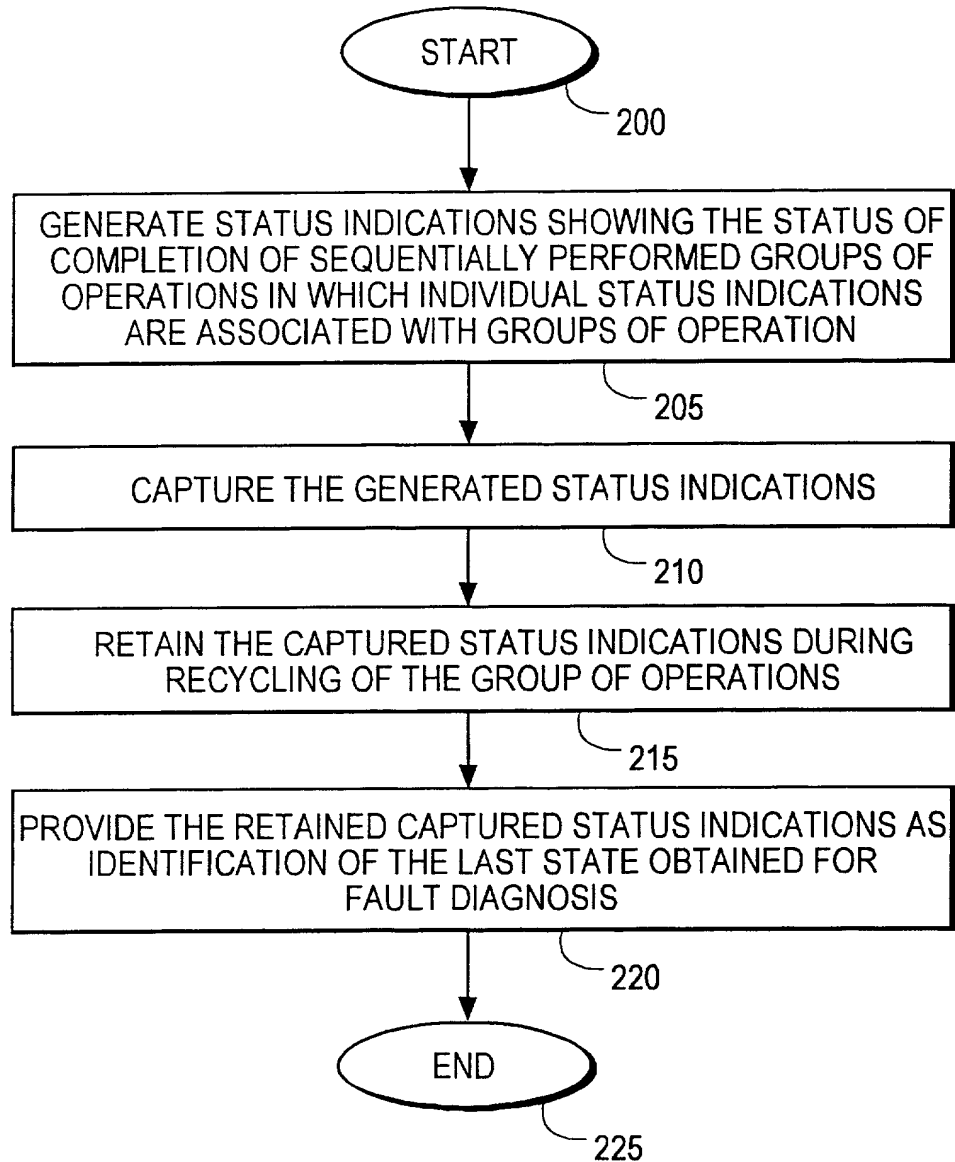


FIG. 4

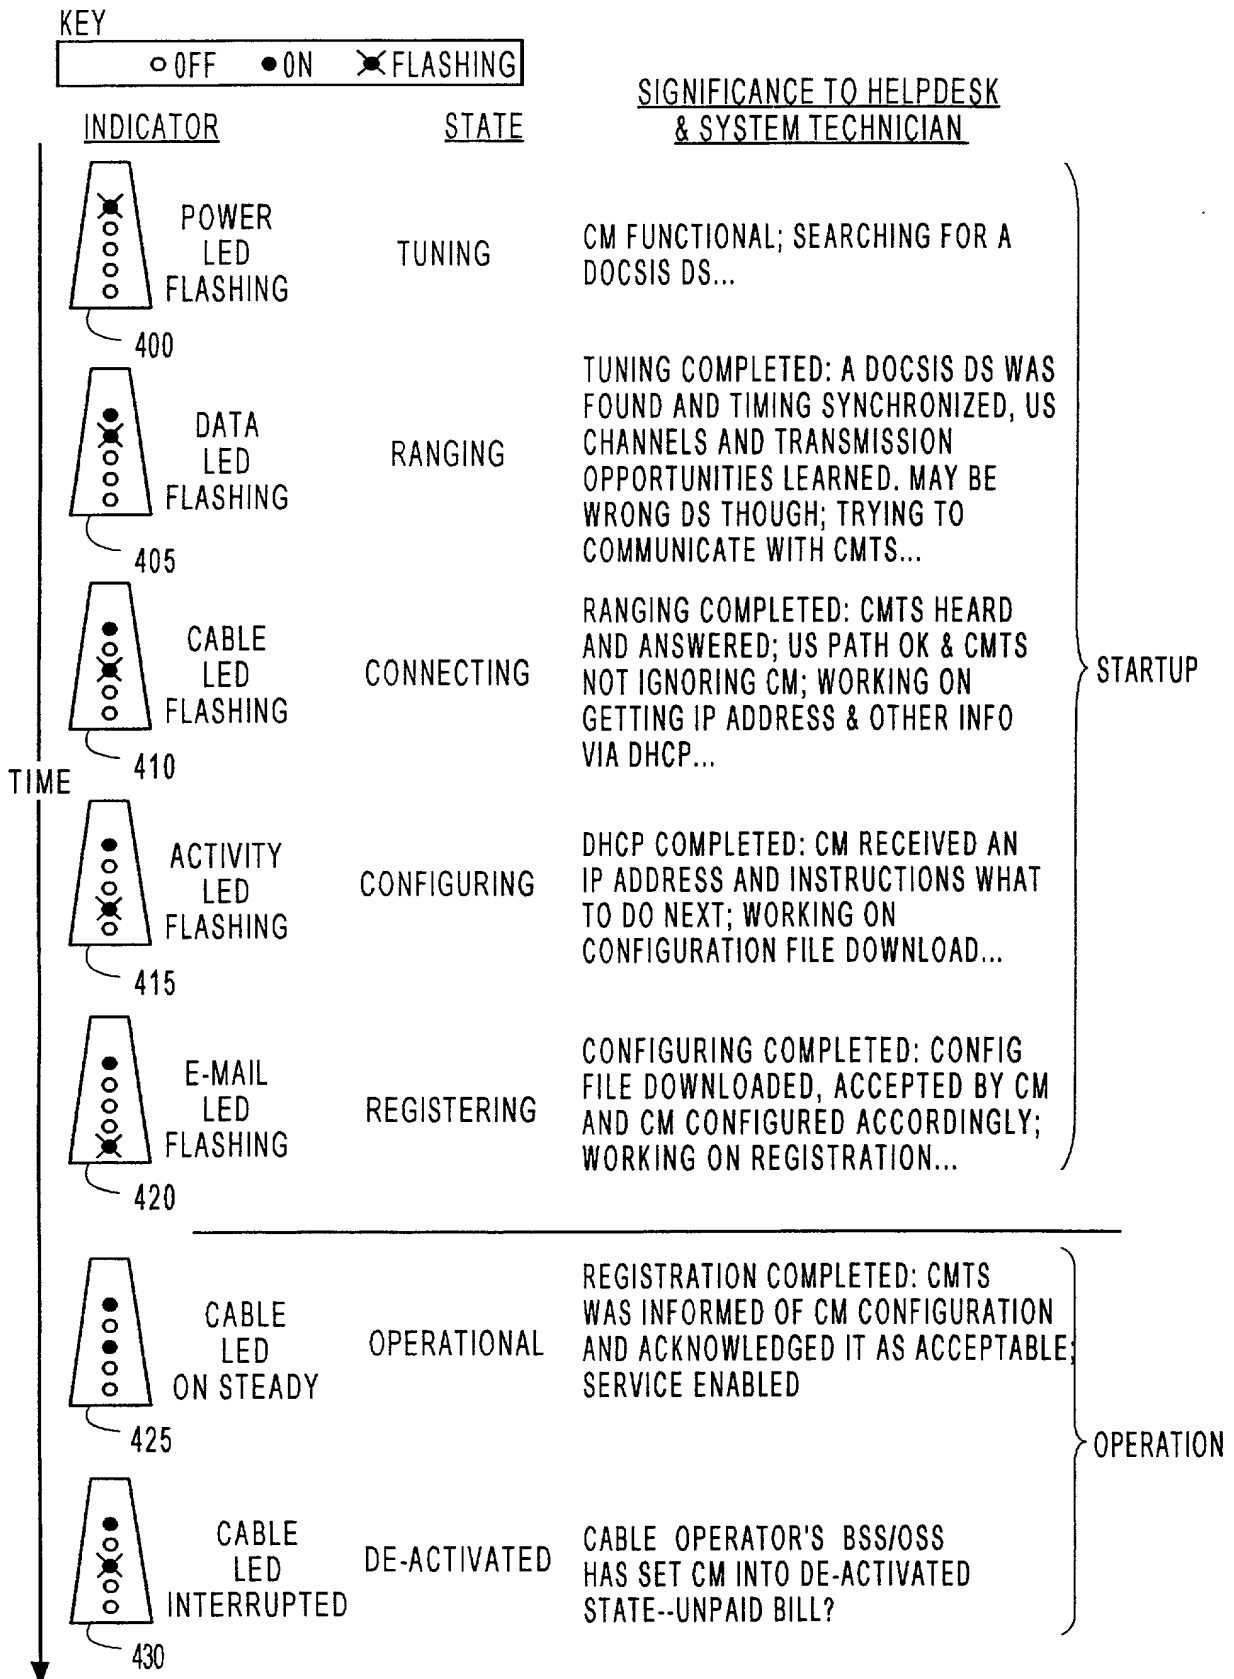


FIG. 5



**DECLARATION AND POWERS OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**OPERATIONAL STATUS IDENTIFICATION SYSTEM FOR A MODEM OR OTHER COMMUNICATION SYSTEM**

the specification of which was filed on Herewith as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_, or, if not identified here by filing date and serial number, is attached hereto.

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate by me or my representatives or assigns for this invention having a filing date before that of the application on which priority is claimed.

Application No. \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_ priority claimed ☐ Yes ☐ No

Application No. \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_ priority claimed ☐ Yes ☐ No

Application No. \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_ priority claimed ☐ Yes ☐ No

I hereby claim the benefit under 35 USC 119(e) of any United States provisional application(s) as listed below.

Application No. 60/169,132 Filed December 6, 1999

Application No. \_\_\_\_\_ Filed \_\_\_\_\_

I hereby claim the benefit under 35 USC 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application

Serial No. \_\_\_\_\_ Filed \_\_\_\_\_ ☐ patented ☐ pending ☐ abandoned

Serial No. \_\_\_\_\_ Filed \_\_\_\_\_ ☐ patented ☐ pending ☐ abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint, individually and collectively, the following as my/our attorney or agent with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith:

Joseph S. Tripoli Registration No. 26,040 and

Ronald H. Kurdyla Registration No. 26,932 and

Alexander J. Burke Registration No. 40,425 and

Registration No. \_\_\_\_\_

PLEASE ADDRESS ALL


COMMUNICATIONS TO: JOSEPH S. TRIPOLI

PATENT OPERATIONS

THOMSON MULTIMEDIA LICENSING INC.

P. O. Box 5312

PRINCETON, NEW JERSEY 08543-5312

Sole or Joint Inventor (1)	<u>LARRY CECIL BROWN</u>	
	(Type or Print)	(Signature in Full. No initials.)
Citizenship	<u>USA</u>	Date <u>9/20/00</u>
Post Office Address	<u>20 Evening Rose Way, Westfield, Indiana 46074</u>	
Residence	<u>Westfield, (Hamilton County), Indiana 46074</u>	
Sole or Joint Inventor (2)	_____	_____
	(Type or Print)	(Signature in Full. No initials.)
Citizenship	_____	Date _____
Post Office Address	_____	
Residence	_____	
Sole or Joint Inventor (3)	_____	_____
	(Type or Print)	(Signature in Full. No initials.)
Citizenship	_____	Date _____
Post Office Address	_____	
Residence	_____	